



 <p>S235300IC</p>	<p>Opticki LNB Televes offset feed</p> <p>G = 72 dB 1310nm & izlazna snaga 7dBm (tip.) konektor opticki FC/PC NF<0,5dB (-30/+60 C) napajanje 12Vdc/ 250mA (uključen adapter 12Vdc konektor F)</p>
 <p>S236300IC</p>	<p>Opticki LNB Televes primefocus feed</p> <p>G = 72 dB 1310nm & izlazna snaga 7dBm (tip.) konektor opticki FC/PC NF<0,5dB (-30/+60 C) napajanje 12Vdc/ 450mA (uključen adapter 12Vdc konektor F)</p>
 <p>S236801IC</p>	<p>Opticki SET Televes LNB + ODU32</p> <p>G = 72 dB NF<0,5dB (-30/+60 C) LNB offset - konektor N muski ODU32 -1310nm ODU32 FC/PC (2 opticka izlaza)</p> <p>* komplet za FO distribuciju SAT+ KDS/ZAS/DTT signala</p>
 <p>S237002IC</p>	<p>Opticki konvertor Televes Quattro IF</p> <p>Frekventni opseg: 47-862/950-2150 MHz Izlazni nivo SAT: 75dBuV (tip.), HVHV Izlazni nivo FM/DTT: 74dBuV (1 multipleks) Opticka snaga na ulazu: -15 do 0 dBm 1100nm - 1650nm, FC/PC Napajanje 10Vdc-20Vdc / 250mA@10Vdc (uključen adapter)</p>
 <p>S235100IC</p>	<p>Opticki konvertor Televes Quad IF</p> <p>Frekventni opseg: 950-2150 MHz Izlazni nivo SAT: -65 ... -25 dBm, HVHV FC/PC opticki konektori Napajanje preko SAT risivera</p>



S236901IC

Opticki konvertor Televes GTU Quad IF

Frekventni opseg: 47-862/950-2150 MHz
Opticka snaga na ulazu: -15 do 0 dBm
Talasna duzina: 1100nm, FC/PC
Napajanje 20Vdc / 800mA



S235XX01IC

Opticki razdelnik Televes


Opticki konektor FC/PC
1310/1550nm
Opticki kabl monomodni (SM)
Slabljenje: 2 izlaza - 4 dB
Slabljenje: 3 izlaza - 5.5 dB
Slabljenje: 4 izlaza - 7 dB
Slabljenje: 8 izlaza - 10.1 dB



S2361XXIC

Single-mod patch cord Televes

Opticki patch ("peč") cord kablovi
Opticki konektor FC/PC
Spoljni omotac: Halogen Free (LSFH)
Opticki kabl monomodni (SM) G657A
Uneseno slabljenje: <0.2dB
Slabljenje: 0.3dB/km
Duzine (m):
3, 5, 10, 20, 30, 40, 50, 75, 100, 200

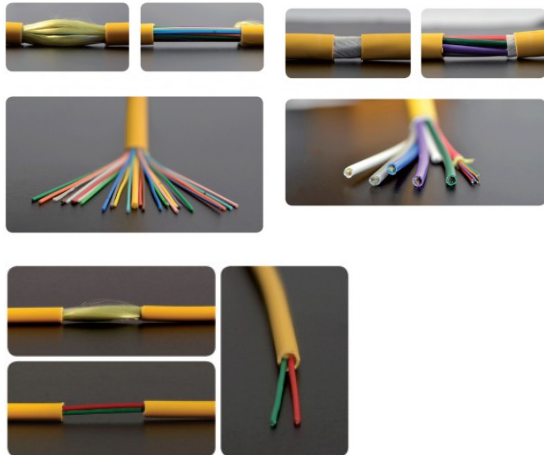

S231601IC

Opticki kabl Televes






Opticki kabl sa 48, 24, 2 singlmodna (SM) opticka vlakna (standard ITU-T G.657-A2)
Spoljni omotac: Halogen Free (LSFH)
Tip optickog vlakna: 9/125 G657A2
Slabljenje: <0.4dB/km(1310nm), <0.3dB/km(1550nm)
Dostupne duzine:
kabl sa 48 vlakna - 800m
kabl sa 24 vlakna - 2000m
kabl sa 2 vlakna - 200m, 300m



S236XXXIC

Opticki atenuator Televes

Opticki konektor FC/PC
Slabljenje:
5dB, 10dB, 15dB

 <p>S232900IC</p>	<p>Opticki konektor Televs</p> <p>Opticki konektor SC/APC Laka montaza quick assembly connector</p>
 <p>S235400IC</p>	<p>Opticka spojnica (FC/FC Fibre Joint)Televs</p> <p>Prelaz FC/PC na FC/PC zenski/zenski</p>
 <p>S235600IC</p>	<p>Opticka spojnica (FC/SC adapter) Televs</p> <p>Prelaz: FC/PC na SC/APC zenski/zenski</p>
 <p>S233202IC</p>	<p>Opticka spojnica (SC/APC adapter) Televs</p> <p>Prelaz: SC/APC na SC/APC zenski/zenski</p>
 <p>S232601IC</p>	<p>Pigtail kabl (patch cord) SC/APC Televs</p> <p>Singlmod opticki (SM) kabl: duzina/lenght 4m Konektori: SC/APC(muski) / SC/APC(muski)</p>