



Splitter. Razdelnik 1/2 P5150IC

Referenca		P5150IC	
Broj izlaza	n°	2	
Frekventni opseg		MATV	IF SAT
Unešeno slabljenje		4	5
Izolacija između izlaza		> 20	
Oklopljenost	30-300 MHz	dB	> 85
	300-470 MHz		> 80
	470-1000 MHz		> 75
	1000-2000 MHz		> 55
Maks. struja u prolazu (izlazi→ulaz)	A	1	
Dimenzije	mm	76x38x26	
Težina	gr	120	

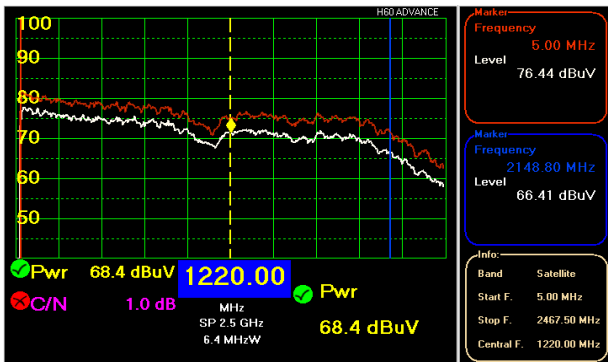

Frekventni odziv (crvenom bojom ulazni spektar, belom bojom izlazni spektar)

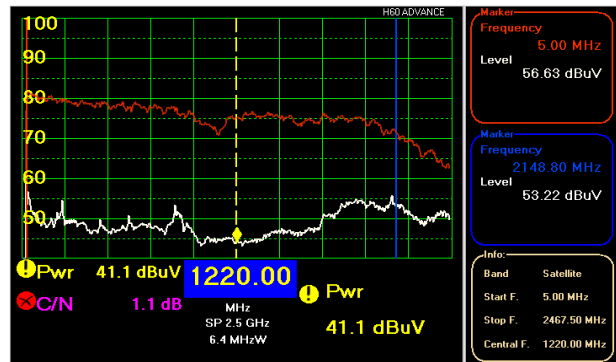


Izolacija između izlaza




Splitter. Razdelnik 1/3 P5151IC


Referenca		P5151IC	
Broj izlaza	n°	3	
Frekventni opseg		MATV	IF SAT
Unešeno slabljenje		7	9
Izolacija između izlaza		> 20	
Oklopljenost	30-300 MHz	dB	> 85
	300-470 MHz		> 80
	470-1000 MHz		> 75
	1000-2000 MHz		> 55
Maks. struja u prolazu (izlazi→ulaz)	A	1	
Dimenzije	mm	76x38x26	
Težina	gr	120	

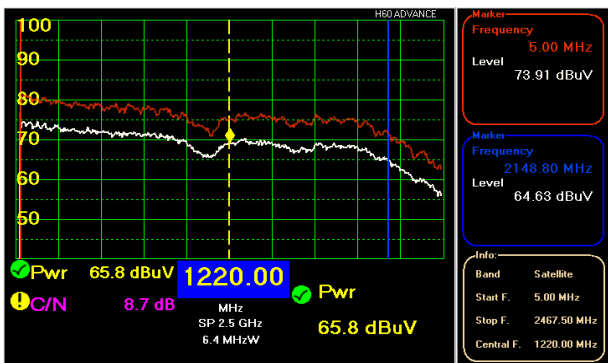

Frekventni odziv (crvenom bojom ulazni spektar, belom bojom izlazni spektar)

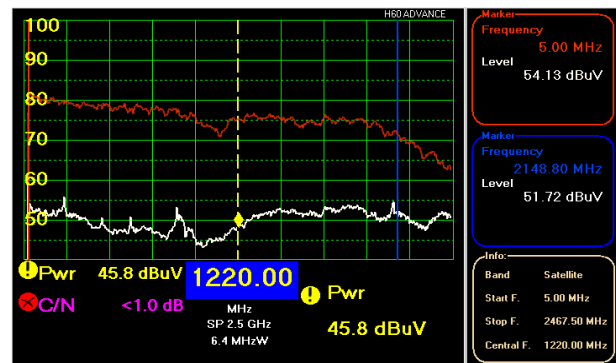


Izolacija između izlaza




Splitter. Razdelnik 1/4 P5152IC

Referenca		P5152IC	
Broj izlaza	n°	4	
Frekventni opseg		MATV	IF SAT
Unešeno slabljenje		7,5	10
Izolacija između izlaza		> 20	
Oklopljenost	30-300 MHz	dB	> 85
	300-470 MHz		> 80
	470-1000 MHz		> 75
	1000-2000 MHz		> 55
Maks. struja u prolazu (izlazi→ulaz)	A	1	
Dimenzije	mm	116x38x6	
Težina	gr	175	

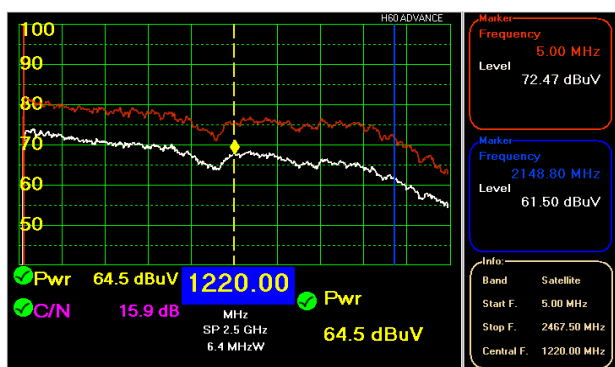

Frekventni odziv (crvenom bojom ulazni spektar, belom bojom izlaznispektar)

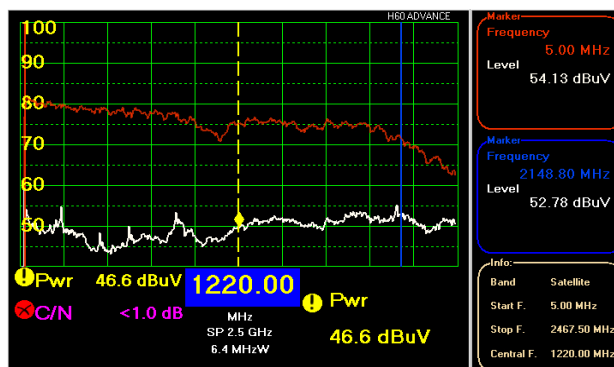


Izolacija između izlaza




Splitter. Razdelnik 1/5 P5153IC


Referenca		P5153IC	
Broj izlaza	n°	5	
Frekventni opseg		MATV	IF SAT
Unešeno slabljenje		10	12
Izolacija između izlaza		> 20	
Oklopljenost	30-300 MHz	dB	> 85
	300-470 MHz		> 80
	470-1000 MHz		> 75
	1000-2000 MHz		> 55
Maks. struja u prolazu (izlazi→ulaz)	A	1	
Dimenzije	mm	116x38x6	
Težina	gr	175	

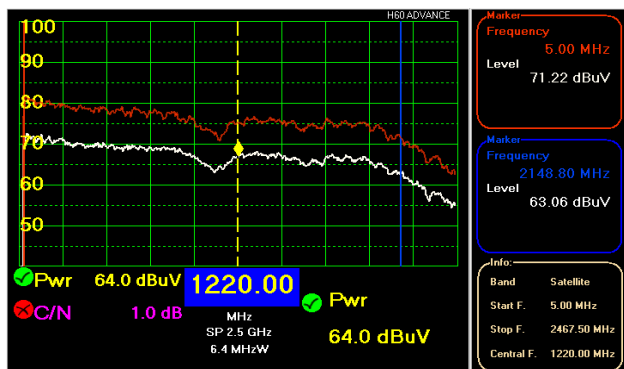

Frekventni odziv (crvenom bojom ulazni spektar, belom bojom izlaznispektar)

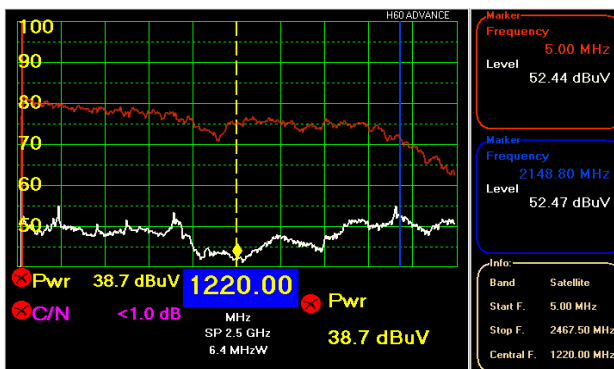


Izolacija između izlaza




Splitter. Razdelnik 1/6 P7441C

Referenca		P7441C	
Broj izlaza	n°	5	
Frekventni opseg		MATV	IF SAT
Unešeno slabljenje		12	16
Izolacija između izlaza		> 17	
Oklopljenost	30-300 MHz	dB	> 85
	300-470 MHz		> 80
	470-1000 MHz		> 75
	1000-2000 MHz		> 55
Maks. struja u prolazu (izlazi→ulaz)	A	1	
Dimenzije	mm	135x55x26	
Težina	gr	225	

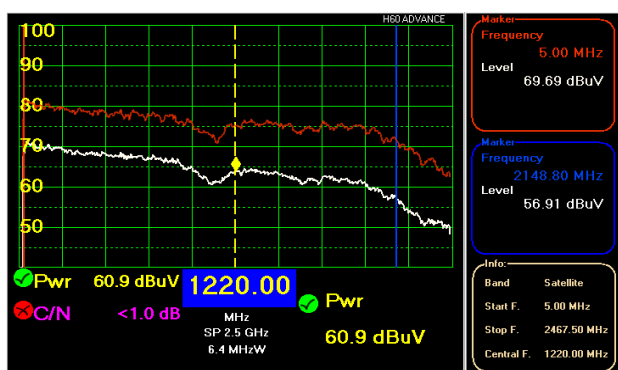

Frekventni odziv (crvenom bojom ulazni spektar, belom bojom izlazni spektar)

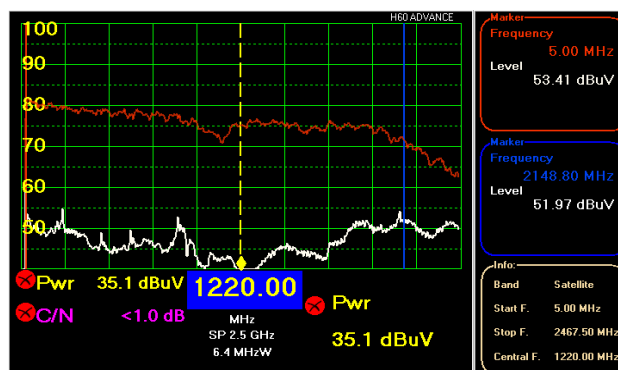


Izolacija između izlaza




Splitter. Razdelnik 1/8 P7406C

Referenca		P7406C	
Broj izlaza	n°	8	
Frekventni opseg		MATV	IF SAT
Unešeno slabljenje		13	18
Izolacija između izlaza		> 18	
Oklopljenost	30-300 MHz	dB	> 85
	300-470 MHz		> 80
	470-1000 MHz		> 75
	1000-2000 MHz		> 55
Maks. struja u prolazu (izlazi→ulaz)	A	1	
Dimenzije	mm	135x55x26	
Težina	gr	225	

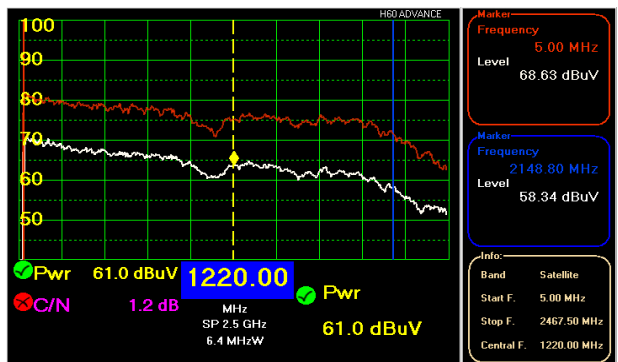

Frekventni odziv (crvenom bojom ulazni spektar, belom bojom izlazni spektar)

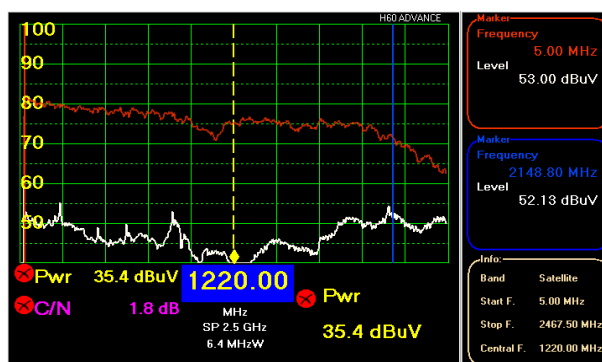

Izolacija između izlaza