

FM/ BIII

FM


Antena sa savijenim dipolom i kruznim dijagramom zracenja




1201

Referenca		1201	
Band		FM	
Dobitak	dB	1	
Odnos napred-nazad		0	
Duzina	mm	500	
Opterecenje na vetar	800 N/m ²	N	27
	1100 N/m ²		37
Pritisak vetra	N/m ²	800	1100
Brzina vetra	Km/h	130	150

Frekventni odziv

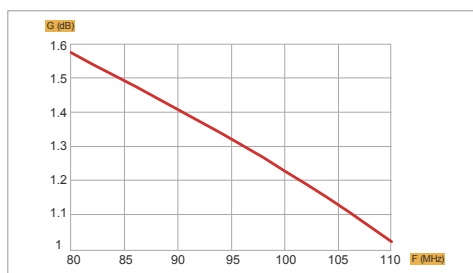

Dijagram zracenja

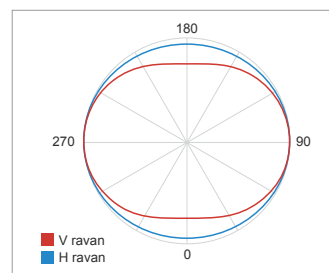

Band III

Klasicna Jagi antena za BIII koja se sastoji od reflektora, savijenog dipola i direktora.

Plasticno kuciste sa prilagodnim clanom 300/75 oma i izlaznim F konektorom za prikljucenje koaksijalnog kabl.


PRODUCT RANGE	
Ref.	DeSCRIPTION
1065	5-12 ch., 7 elementa
1048	9-10 ch, 7 elementa
1291	5-12 ch., 9 elementa



1065

Referenca		1065	1048	1291	
Broj elemenata		7	7	9	
Dobitak	dB	9.5	9.5	10	
Odnos napred-nazad		20	20	24	
Duzina	mm	1460	1460	1650	
Opterec. na vetar	800 N/m ²	N	71	69.1	80.6
	1100 N/m ²		97.7	95	110.8
Pritisak vetra	N/m ²	800	1100		
Brzina vetra	Km/h	130	150		

Frekventni odziv

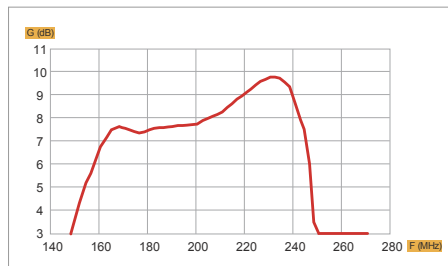

Dijagram zracenja

